


8mm Water Resistant Laminate with AtroGuard Technology and Advanced Texturing



CHEQ1270  
Sandstone

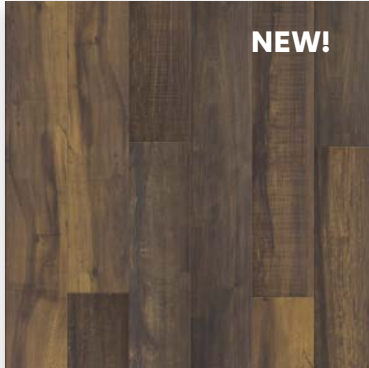

CHEQ1055  
Victoria\*



CHEQ1275  
Pendleton



CHEQ28966  
Broadmoor



CHEQ28962  
Briarwood



CHEQUINOX775  
Bandon



CHEQUINOX842  
Brighton

**SPECIFICATIONS:**

**Dimensions:** 8mm thick x 6.5" wide x 47-5/8" length

**Packaging:** 21.64 sf/ctn, 45 ctn/pal, 973.8 sf/plt

**Finish:** Embossed-In-Register, Advanced Texturing, AC4 Wear Layer

**Profile:** 4-Sided Micro-Beveled Edges

**Installation:** TightLock (drop & tap) + 1.5mm Attached Pad  
(requires tapping block & rubber mallet)

**Recommended Cleaner:** FreshFloors by WF Taylor

**Warranty:** Lifetime Residential, 15yr Light Commercial/Multi-Family

Our AtroGuard Core is more dense, more flexible and more resistant to swelling.

TightLock blocks water from penetrating the floor for at least 72 hours.

Sound deadening attached pad reduces noise and adds comfort underfoot.

Cleanable with a wet-mop!

Equinox can be installed over 4,000sf with no expansion moldings



Significant  
Color Variation\*



Large  
Install



CA-CARB Phase 2  
Compliant



CORE  
AtroGuard  
Tech.



Water  
Resistant



Tightlock

**Installation Fast Facts:**

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimation: 48 hrs unopened carton
- Moisture Content: Not to Exceed 2.5%
- Expansion Space: 3/8" gap
- Transitions not required in rooms up to 66' w or 66' long
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing