


LAMINATE | CARPET | HARDWOOD | LUXURY VINYL


Water Resistant Laminate + 2mm Attached Pad with a AC3 Wear Surface Rating and Embossed in Register Texturing



Triton 5 | FCLA0102
Heathered Squall

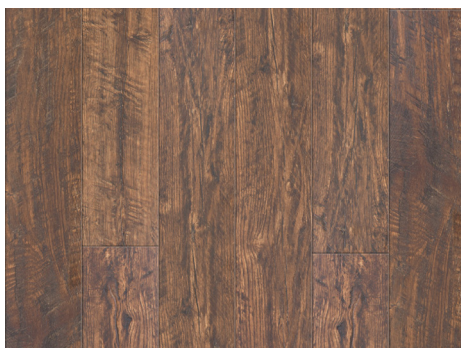


Triton 5 | FCLA0103
Rugged Jetty

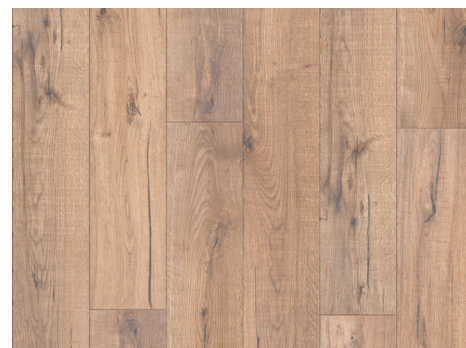

Triton 6.5 | FCLA0203
Shipway



Triton 7.5 | FCLA0302
Breakwater

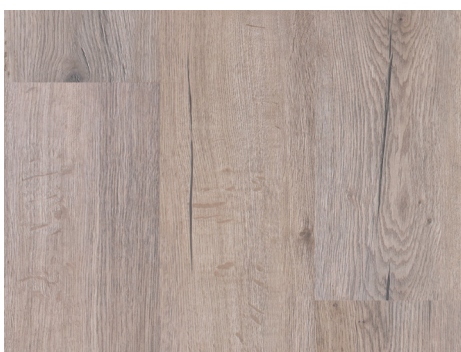

Triton 7.5 | FCLA0301
Caspian Sky

SPECIFICATIONS

Dimensions:

- Triton 5: 5" wide x 48" length, 8mm thick + 2mm Attached Pad
- Triton 6.5: 6.5" wide x 48" length, 8mm thick + 2mm Attached Pad
- Triton 7.5: 7.5" wide x 48" length, 8mm thick + 2mm Attached Pad

Packaging:

- Triton 5: 23.06 sf/ctn, 48 ctn/plt, 1107 sf/plt
- Triton 6.5: 25.89 sf/ctn, 48 ctn/plt, 1243 sf/plt
- Triton 7.5: 20.39 sf/ctn, 55 ctn/plt, 1121.45 sf/plt

Finish: Wear Surface Rating: AC3, Embossed in Register

Profile: 4-sided Micro Bevel, Waxed Edges

Installation: Angle/Drop

Warranty: 25 Yr Residential & Multi-Family, 5 Yr Light Commercial

BENEFITS

- 72 Hour Water Resistant Laminate
- 2mm Attached Pad
- Wet-Mop Approved
- Can be installed in over 4,000 sf with no expansion moldings



INSTALLATION FAST FACTS:

- Radiant Heat: Approved (Hydro Systems ONLY)
- Relative Humidity: 35% - 50%
- Acclimate to normal room conditions
- Room Temperature: 65-80°F
- Expansion Space: 1/4" around perimeter
- Use T-Mold in spaces larger than 66' Length or 4,000 sf
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing