


Product Data

SPECIFICATIONS	
Construction	Rigid Core multi-layer engineered vinyl click consisting of wear layer, film, 4mm rigid core, and 1mm EVA Pad
Classification	ASTM F3261, Class I, Type B, Grade 2, Class B
Finish	Matte Low Gloss, Polyurethane Finish
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Size (nominal)	12" wide x 24" length, 300mm x 600mm
Overall Thickness	5mm (4mm core plus 1mm EVA pad)
Wear Layer Thickness	12mil
Pieces Per Carton	8
Cartons Per Pallet	84
Coverage Per Carton	15.5 sf/ctn
Weight Per Carton	26.25 lbs
INSTALLATION CLICK	
Angle/Angle	
WARRANTIES	
25 Year Residential / 5 Year Light Commercial / 5 Year Multi-Family	


TESTING	
This product is designed and manufactured to meet or exceed ASTM F3261 Standards and Indoor Air Quality standards for Resilient Floor.	
Resilient Floor in Modular Format w/Rigid Polymeric Core	ASTM F3261
Thickness	ASTM F386/387
Wear Layer Thickness	ASTM F410
Stain/Chemical Resistance	ASTM F925
Resistance to Heat	ASTM F1514
Resistance to Light	ASTM F1515
Residual Indentation	ASTM F1914
Size & Squareness	ASTM F2055
Dimensional Stability	ASTM F2199
Dimensional Stability W/Exposure to Heat	ISO 23999
Determination of Geometrical Element	ISO 24337
Static Coefficient Polished Surface	ASTM D2047
Flammability/Radiant Flux	ASTM E648
Static Load	ASTM F970
Smoke Density	ASTM E662
Indoor Air Quality	FloorScore Certification
Ortho-Phthalate Free	

Benefits


- Waterproof core technology protects against spills
- Premium EVA pad attached reduces sound transfer
- Urethane finish provides extra scratch resistance
- Angle/Angle locking system for easy & fast installations
- No transitions required for rooms up to 2,500 sf

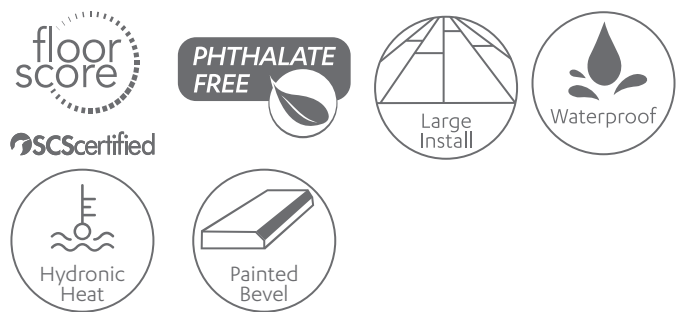

Product Colors



ALRC0301
Lookout Point



ALRC0302
Scenic Byway



ALRC0303
Ocean View



ALRC0304
Rattlesnake Ridge