

8 mm + 1.5 mm Pad Water Resistant Laminate with AtroGuard Technology and EIR Texturing



CH5011270008
Sandstone



CH5011055005
Victoria*



CH5011275006
Pendleton



CH5011193011
Broadmoor



CH5011194006
Briarwood



CH5010775012
Bandon



CH5010842011
Brighton

SPECIFICATIONS:

Dimensions: 8 mm Thick + 1.5 mm Pad x 6.5" Wide x 47-5/8" Length

Packaging: 21.64 sf/ctn, 24 ctn/plt, 519.4 sf/plt

Finish: Embossed-In-Register, Advanced Texturing, AC4 Wear Layer

Profile: 4-Sided Micro-Beveled Edges

Installation: TightLock (drop & tap, requires tapping block & rubber mallet)

Recommended Cleaner: FreshFloors by WF Taylor

Warranty: Lifetime Residential, 15yr Light Commercial/Multi-Family


Our AtroGuard Core is more dense, more flexible and more resistant to swelling.

TightLock blocks water from penetrating the floor for at least 72 hours.

Sound deadening attached pad reduces noise and adds comfort underfoot.

Cleanable with a wet-mop!

Equinox can be installed over 4,000sf with no expansion moldings

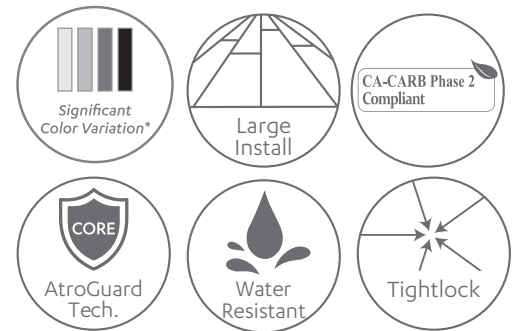

Installation Fast Facts:

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimation: 48 hrs unopened carton
- Moisture Content: Not to Exceed 2.5%
- Expansion Space: 3/8" gap
- Transitions not required in rooms up to 66' w or 66' long
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing