


# CRUISER

## PRODUCT DATA SHEET

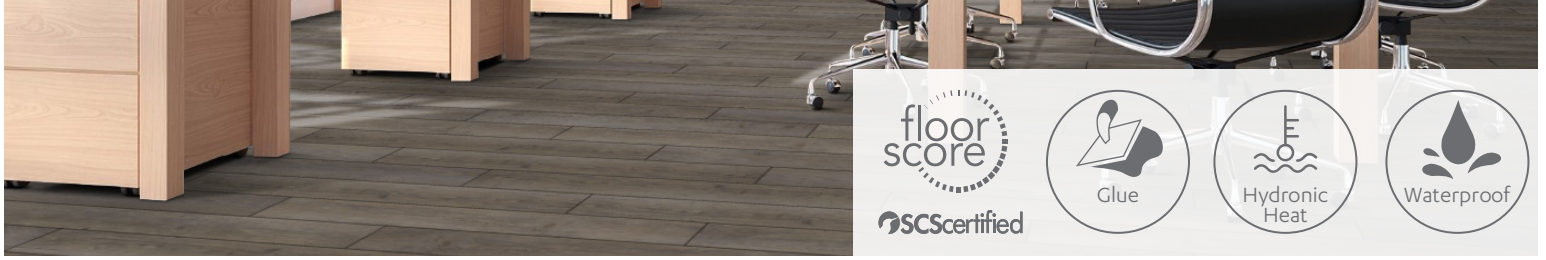

### PRODUCT SPECIFICATIONS

GLUE DOWN LV 2.5 MM, 12 MIL

Construction	Glue Down LV
Classification	ASTM F1700, Class III, Type B
Dimensions (nominal)	7" wide x 60" length, 185 mm x 1524 mm
Overall Thickness	2.5 mm
Wear Layer Thickness	12 mil
Finish Coat	Polyurethane Ceramic Bead
Texture	Low Gloss, Embossed
Edge Profile	Rolled Edge

#### PACKAGING

Coverage Per Carton	18 pc/ctn, 54.625 sf/ctn, 53 lbs/ctn
Coverage Per Pallet	20 ctn/plt, 2185 sf/plt

#### INSTALLATION

Glue Down  
 Recommended Residential & Multi-Family Adhesive: Taylor Dynamic | Commercial Adhesive: Taylor Pinnacle

#### WARRANTIES

20 Year Residential, 5 Year Light Commercial. 5 Year Multi-Family

### PRODUCT TESTING

THIS PRODUCT IS DESIGNED AND MANUFACTURED TO MEET OR EXCEED THE BELOW STANDARDS. PENDING INDEPENDENT ATSM TESTING.

Solid Vinyl Floor Tile	ASTM F1700, Class III, Type B
Flexibility	ASTM F137
Thickness	ASTM F386
Wear layer Thickness	ASTM F410
Stain/Chemical Resistance	ASTM F925
Resistance to Heat	ASTM F1514
Resistance to Light	ASTM F1515
Residual Indentation	ASTM F1914
Size & Squareness	ASTM F2055
Dimensional Stability	ASTM F2199
Static Coefficient Polished Surface	ASTM D2047
Flammability/Radiant Flux	ASTM E648
Static Load	ASTM F970
Smoke Density	ASTM E662
FloorScore Certification	Indoor Air Quality Certified   SCS-EC10.3-2014 v4.0
Orthophthalate Free	