


# CORSAGE

## PRODUCT DATA Sheet

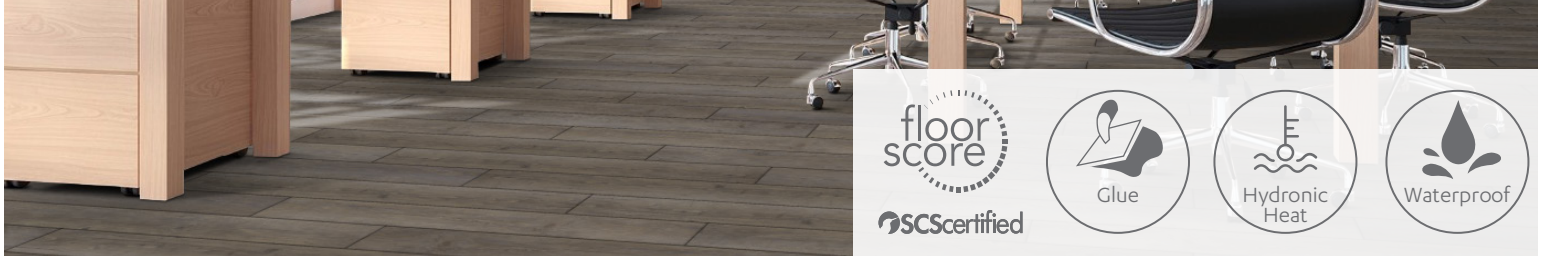

### PRODUCT SPECIFICATIONS

#### GLUE DOWN LV 2 MM, 12 MIL

Construction	Glue Down LV
Classification	ASTM F1700, Class III, Type B
Dimensions (nominal)	7" wide x 60" length, 185 mm x 1524 mm
Overall Thickness	2 mm
Wear Layer Thickness	12 mil
Finish Coat	Polyurethane Ceramic Bead
Texture	Low Gloss, Embossed
Edge Profile	Rolled Edge

#### PACKAGING

Coverage Per Carton	22 pc/ctn, 66.76 sf/ctn, 56.5 lbs/ctn
Coverage Per Pallet	40 ctn/plt, 2670.58 sf/plt

#### INSTALLATION

Glue Down  
 Recommended Residential & Multi-Family Adhesive: Taylor Dynamic | Commercial Adhesive: Taylor Pinnacle

#### WARRANTIES

20 Year Residential, 5 Year Light Commercial. 5 Year Multi-Family

### PRODUCT TESTING

THIS PRODUCT IS DESIGNED AND MANUFACTURED TO MEET OR EXCEED THE BELOW STANDARDS. PENDING INDEPENDENT ATSM TESTING.

Solid Vinyl Floor Tile	ASTM F1700, Class III, Type B
Flexibility	ASTM F137
Thickness	ASTM F386
Wear layer Thickness	ASTM F410
Stain/Chemical Resistance	ASTM F925
Resistance to Heat	ASTM F1514
Resistance to Light	ASTM F1515
Residual Indentation	ASTM F1914
Size & Squareness	ASTM F2055
Dimensional Stability	ASTM F2199
Static Coefficient Polished Surface	ASTM D2047
Flammability/Radiant Flux	ASTM E648
Static Load	ASTM F970
Smoke Density	ASTM E662
FloorScore Certification	Indoor Air Quality Certified   SCS-EC10.3-2014 v4.0
Orthophthalate Free	