

SPC 4.2 MM, 20 MIL




AGRCU0301 | **O.A.T.**




AGRCU0302 | **Camber**



AGRCU0304 | **Magneto**

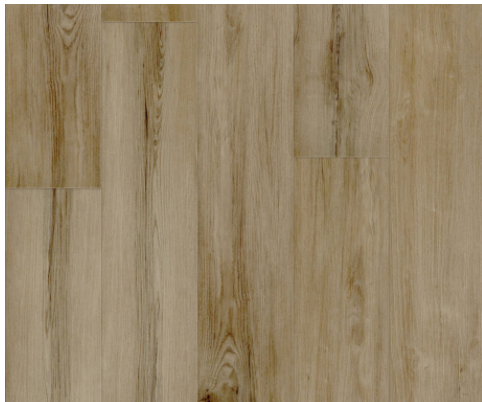

AGRCU0305 | **Lift**

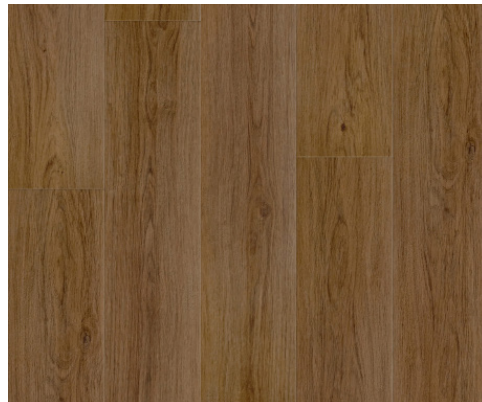

AGRCU0306 | **Axis**



AGRCU0307 | **Thrust**

## SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" Wide x 48" Long, 182 mm x 1220 mm
Overall Thickness	4.2 mm (includes 1 mm pad)
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	33.476 sf/carton - 45 carton/pallet - 1506.4 sf pallet
Installation	Angle / Angle
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance
- Minimum 3500 PSI for Concrete/Gypcrete Substrates  
Read Complete Instructions Before Installing



tasflooring.com

SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE

