

ABA SPC 4.5 MM, 12 MIL




WIRC0501 | **Tanunda Hickory**



WIRC0502 | **Lager Hickory**



WIRC0503 | **Porter Hickory**

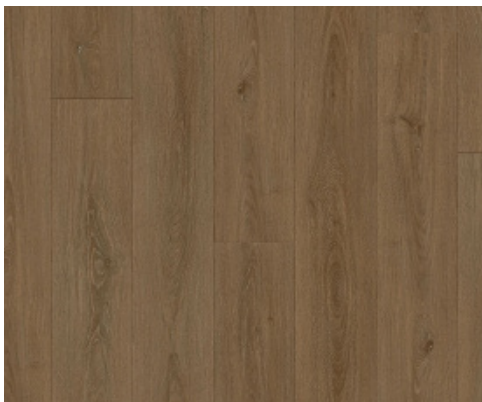

WIRC0504 | **Erdinger Oak**



WIRC0505 | **Yebinna Oak**



WIRC0506 | **Calla Acacia**

SPECIFICATIONS

Construction	ABA SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7.25" Wide x 48" Long, 183 mm x 1220 mm
Overall Thickness	4.5 mm (includes 1 mm pad)
Wear Layer	12 mil
Finish Coat	Polyurethane + Anti-Microbial & Anti-Scratch
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	28.84 sf/carton - 55 carton/pallet - 1586.2 sf pallet
Installation	Angle / Angle
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 1/8" in 6'
- Floating floors must be allowed to expand and contact with no restrictions
- Avoid prolonged direct sunlight

Read Complete Instructions Before Installing

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

tasflooring.com

