


CONCORD

PRODUCT SPECIFICATIONS

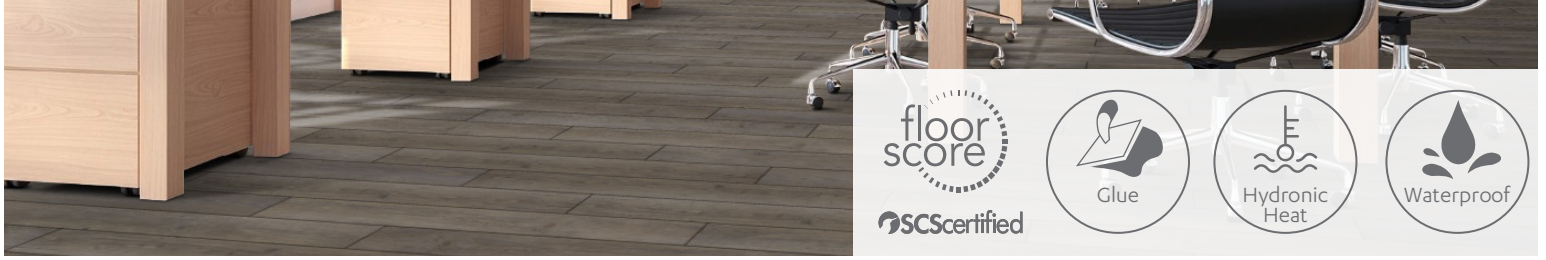

Product Specifications

Type	
Construction	Solid Vinyl glue down luxury vinyl consisting of wear layer, printed film, and 2.5mm solid core
Classification	ASTM F1700, Class III, Type B
Finish Coat	Polyurethane Ceramic Bead Coating
Texture	Embossed
Edge Profile	4-Sided Square Edge
Size	7" width x 48" length, 177.8mm x 1219.2mm
Overall Thickness	2.5mm
Wear Layer Thickness	20mil
Pieces Per Carton	18
Cartons Per Pallet	50
Coverage Per Carton	42.03 sf/ctn
Weight Per Carton	33 lbs

Installation	
Glue Down Adhesive: Residential & Multi-Family	- WF Taylor Dynamic
Glue Down Adhesive: Commercial	- WF Taylor Pinnacle

Warranties	
Limited Lifetime Residential, 15 Yr Multi-Family, 15 Yr Commercial	

Test Method & Requirements		
Solid Vinyl Floor Tile	ASTM F1700	Class III, Type B
Flexibility	ASTM F137	Meets
Thickness	ASTM F386	Meets
Wear layer Thickness	ASTM F410	Meets
Stain/Chemical Resistance	ASTM F925	Meets
Resistance to Heat	ASTM F1514	Meets
Resistance to Light	ASTM F1515	Meets
Residual Indentation	ASTM F1914	Meets
Size & Squareness	ASTM F2055	Meets
Dimensional Stability	ASTM F2199	Meets
Static Coefficient Polished Surface	ASTM D2047	Exceeds Industry Standard
Flammability/Radiant Flux	ASTM E648	Class I
Static Load	ASTM F970	>250 lbs
Smoke Density	ASTM E662	Meets
FloorScore Certification	Indoor Air Quality Certified SCS-EC10.3-2014 v4.0	#SCS-FS-07285
Orthophthalate Free		Pass

Additional Specifications, Full Installation Instructions & Warranty Information Available at www.tasflooring.com | a division of **TAS** supply company, inc.