

# CORSAGE


2.0 MM, 12 MIL



**Mimosa** | CTLV0102



**Primrose** | CTLV0103

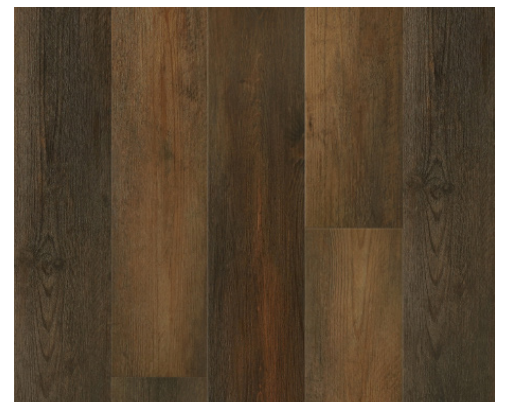


**Aster** | CTLV0104



**Dahlia** | CTLV0105



**Gardenia** | CTLV0106

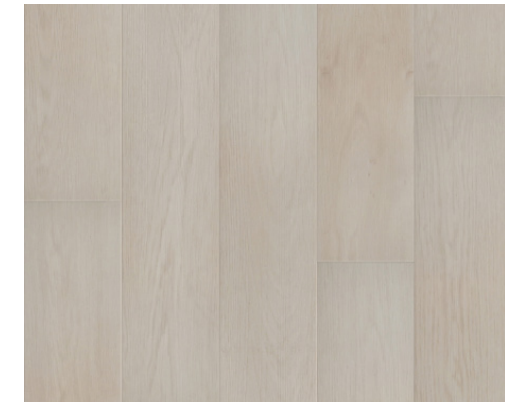

**Camelia** | CTLV0107

## SPECIFICATIONS

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 60" Long, 185 mm x 1524mm
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	UV Ceramic Bead
Texture	Embossed
Edge Profile	Soft Rolled
Packaging	66.76 sf/carton - 40 carton/pallet - 2670.58 sf pallet
Installation	Glue Down
Recommended Adhesive	WF Taylor: Pinnacle, Dynamic or Resolute
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 20 Yr Residential

## INSTALLATION FAST FACTS

- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F, RH Between 35% - 55%
- Do not net or compression fit
- Minimum 3500 PSI for Concrete/Gypsum
- Hydro Radiant Heat approved (≤ 85°F)
- Roll flooring immediately after installation in two directions, reroll 2 hours later
- Follow adhesive instructions for substrate moisture, coverage, PH, porosity, and open time
- Repair or replace worn trowel notches
- Insure floor flatness to within 1/8" in 6'

Read Complete Instructions Before Installing



tasflooring.com

SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE



SCS Certified

Additional Specifications, Full Installation Instructions & Warranty Information Available Online

tasflooring.com | a division of T&A supply company, inc.