

## SPC 2.0 MM, 12 MIL

Construction	Glue Down LV
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 60" Long, 185 mm x 1524 mm
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	Polyurethane Ceramic Bead
Texture	Low Gloss, Embossed
Edge Profile	Rolled Edge
Packaging	66.76 sf/carton - 40 cartons/pallet - 2670.58 sf/pallet

### Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor


### Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore Certified # SCS-EC10.3-2014 v4.0

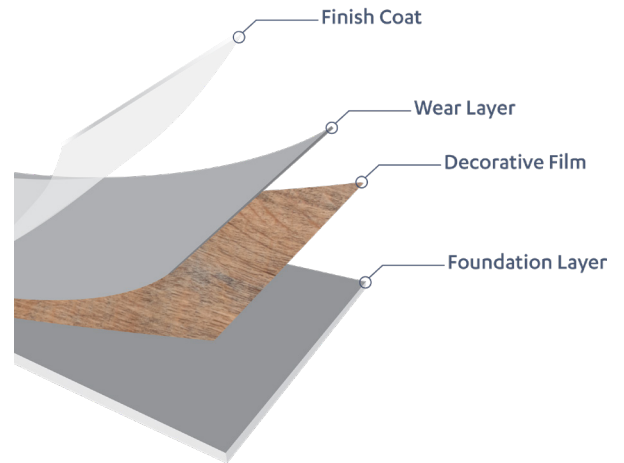

### Warranty & Maintenance

5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

QNose Stair Nosing: [tasflooring.com](http://tasflooring.com)

### Layout Options:

