

CRUISER

LV 2.5 MM, 12 MIL

Construction	Glue Down LV
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 60" Long, 185 mm x 1524 mm
Overall Thickness	2.5 mm
Wear Layer	12 mil
Finish Coat	Polyurethane Ceramic Bead
Texture	Low Gloss, Embossed
Edge Profile	Rolled Edge
Packaging	54.625 sf/carton - 40 cartons/pallet - 2185 sf/pallet

Installation & Maintenance

Glue Down

Layout Room size: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements


Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Industry Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Impact Insulation Class IIC

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certified Certificate # SCS-EC10.3-2014 v4.0

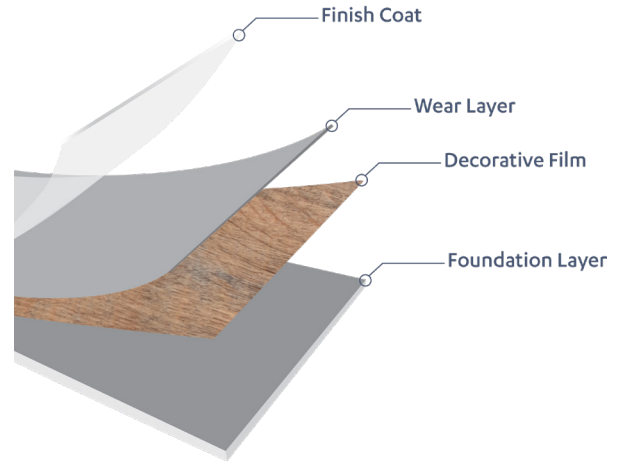

Warranty & Maintenance


5 Yr Light Commercial, 5 Yr Multi-Family, 20 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

QNose Stair Nosing: tasflooring.com/qnose-stair-shop/

Layout Options: Random

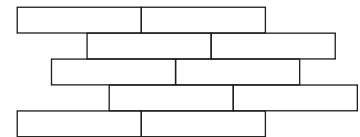

SCS Certified

