


# AMBIANCE

ABA LSPC 10 MM, 20 MIL



**Maestro** | WIRC0601

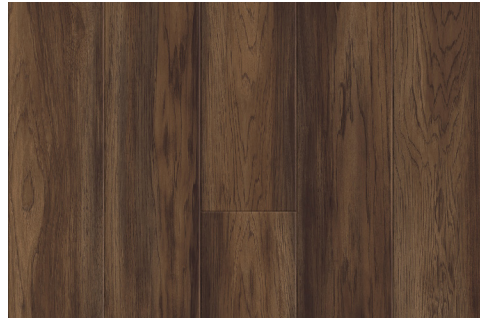

**Bacchus** | WIRC0602




**Orion** | WIRC0603




**Pedestal** | WIRC0604



**Virtuoso** | WIRC0605

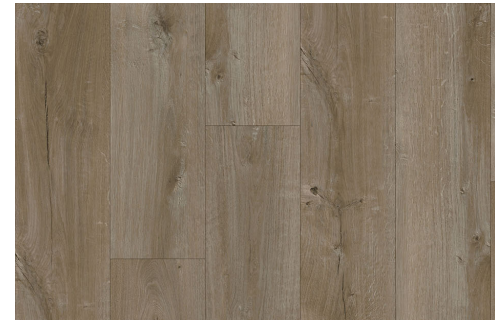

**Spectrum** | WIRC0606

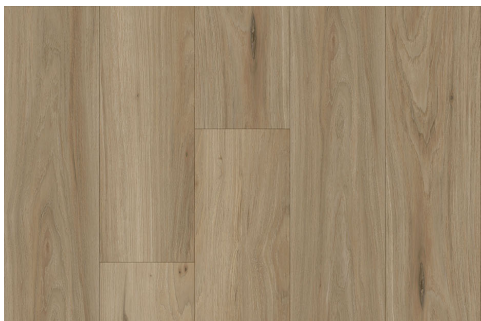

**Provost** | WIRC0607



**Thaddeus** | WIRC0608

## SPECIFICATIONS

Construction	LSPC Hybrid Luxury Vinyl, ABA Foam Rigid Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7.125" Wide x 60" Long, 181 mm x 1524 mm
Overall Thickness	10 mm (includes 2 mm IXPE pad)
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane + Antimicrobial & Anti-Scratch Coating
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	23.75 sf/carton - 40 carton/pallet - 950 sf/pallet
Installation	Angle / Angle
Warranty	30 Yr Residential, 10 Yr Light Commercial, 10 Yr Multi-Family

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'

Read Complete Instructions Before Installing



tasflooring.com

**SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**



Additional Specifications, Full Installation Instructions & Warranty Information Available Online

tasflooring.com | a division of **T&A supply company, inc.**