

ABA 5.0 MM, 20 MIL



**Nicholas** | WIRC0401




**Greensboro** | WIRC0402




**Middlebury** | WIRC0403



**Carlsberg** | WIRC0404

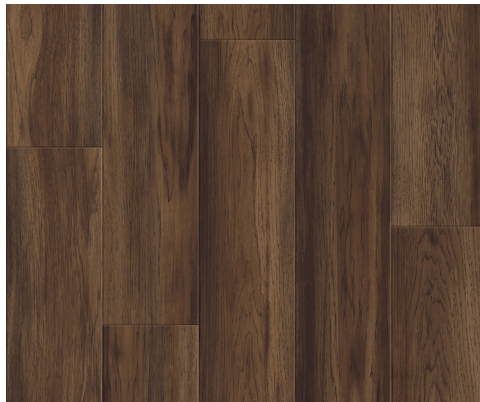

**Brennen** | WIRC0405

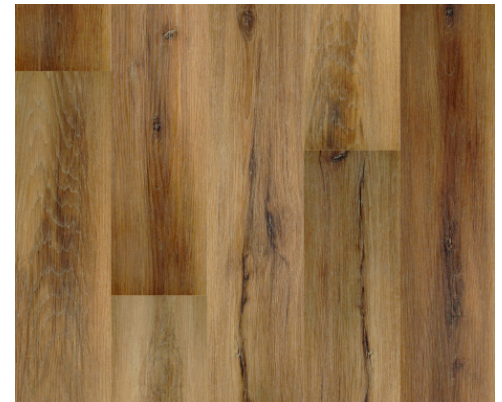

**Lansing** | WIRC0406

## SPECIFICATIONS

Construction	ABA Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7.25" Wide x 60" Long, 183 mm x 1524mm
Overall Thickness	5.0 mm (includes 1 mm pad)
Wear Layer	20 mil
Finish Coat	Polyurethane + Anti-Microbial & Anti-Scratch
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	30.02 sf/carton - 45 carton/pallet - 1350.9 sf pallet
Installation	Angle / Angle, Float
Warranty	10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 1/8" in 6'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE

tasflooring.com



SCS Certified

Additional Specifications, Full Installation Instructions & Warranty Information Available Online

tasflooring.com | a division of T&A supply company, inc.