

ABA SPC 4.5 MM, 12 MIL

| | |
|-------------------|--|
| Construction | ABA Rigid Core, Stone Polymer Composite |
| Classification | ASTM F3261, Class 1, Type B, Grade 1, Class B |
| Dimensions | 7.25" Wide x 48" Long, 183 mm x 1220 mm |
| Overall Thickness | 4.5 mm (Includes 1 mm pad) |
| Attached Pad | 1 mm IXPE Sound Abatement Pad |
| Wear Layer | 12 mil |
| Finish Coat | Polyurethane + Anti-Microbial & Anti-Scratch |
| Texture | Embossed |
| Edge Profile | 4-Sided Painted Bevel |
| Packaging | 28.84 sf/carton - 55 cartons/pallet - 1586.2 sf/pallet |

Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements

| | | |
|---|------------------|------------------|
| Resilient Floor in Modular Format | ASTM F3261 | Pass |
| Thickness (with Pad) | ASTM F386/ (387) | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Stain/Chemical Resistance | ASTM F925 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2055 | Pass |
| Dimensional Stability w/Exposure to Heat | ASTM F2199 | Pass |
| Dimensional Stability w/Exposure to Heat | ISO 23999 | Pass |
| Determination of Geometrical Characteristics | ISO 24337 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit | ASTM F970 | Pass >250 LBS |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |
| Impact Insulation Class IIC | ASTM E492* | |
| Sound Transmission Class STC | ASTM E90* | |


*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certificate # SCS-FS-05909

Hydrophobic Antimicrobial Surfaces ASTM E 2180-18 Reduction % >99.9

Phthalate-Free

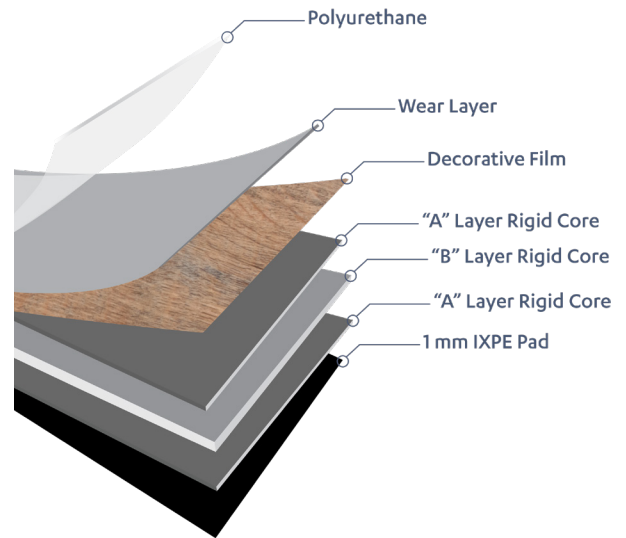

Warranty


5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:



ASHLAR



STAGGER