

COMPLIMENT

SPC 4.5 MM, 8 MIL




Mimosa | CTCRC0102



Primrose | CTCRC0103



Gardenia | CTCRC0106

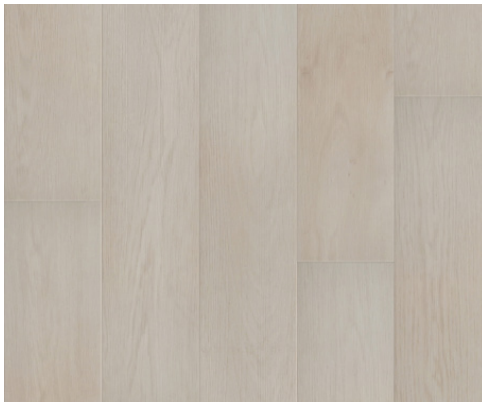

Camellia | CTCRC0107



Sloop | CTCRC0205

SPECIFICATIONS

Construction	SPC, Stone Polymer Composite, Rigid Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" Wide x 48" Long, 183 mm x 1220 mm
Overall Thickness	4.5 mm (includes 1 mm EVA pad)
Wear Layer	8 mil
Finish Coat	Low Gloss, Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	33.648 sf/carton - 50 carton/pallet - 1682.4 sf/pallet
Installation	Angle / Angle, Float
Warranty	25 Yr Residential, 5 Yr Light Commercial, 5 Yr Multi-Family

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tastflooring.com

SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE



Additional Specifications, Full Installation Instructions & Warranty Information Available Online

tastflooring.com | a division of **T&A supply company, inc.**