

LAMINATE 8.0 MM + 2 MM ATTACHED PAD



Buttermilk* | UMLI22081



Monarch Oak* | UMLI22082




Gold Creek* | UMLI22084



Yellowstone* | UMLI22085



Miller Lake | UM162542204

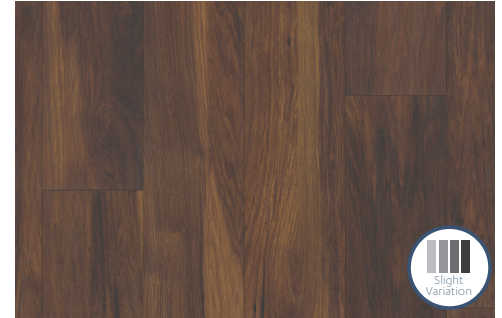

Sauble Beach | UM162542205



Simcoe | UM162542207



Oberlin | UM162542208

SPECIFICATIONS

Construction	8 mm Water Resistant Core Laminate + 2 mm XPS Attached Pad
Dimensions	8-1/32" Wide x 47-5/8" Long
Overall Thickness	10 mm (includes 2 mm XPS pad)
Wear Surface	AC4 Rating
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	18.6 sf/carton - 68 carton/pallet - 1264.8 sf/pallet
*Packaging	18.6 sf/carton - 72 carton/pallet - 1339.2 sf/pallet
Installation	Angle / Horizontal Tap
Warranty	Lifetime Residential, 10 Yr Light Commercial, 10 Yr Multi-Family

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Leave 3/8" expansion for areas over 25'
- Transitions required for rooms larger than 45'L or 45"W
- Subfloors dry and flat (3/16" in 10')
- Installation on or below grade concrete requires 6 mil moisture barrier

Read Complete Instructions Before Installing



tasflooring.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**



Made in the
USA

