

# SPECMASTER 2.0 MM

## GLUE DOWN 2.0 MM, 12 MIL

Construction	Solid Luxury Vinyl
Classification	ASTM F1700, Class III, Type B
Dimensions	7.25" Wide x 48" Long, 185 mm x 1229 mm
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	Low Gloss, UV Ceramic Coating
Texture	Embossed
Edge Profile	Rolled Edges
Packaging	58.74 sf/carton - 45 cartons/pallet - 2643 sf/pallet

### Installation & Maintenance

Glue Down Adhesive: Residential & Multi-Family - WF Taylor Dynamic

Commercial - WF Taylor Pinnacle or Resolute

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH Cleaner


### Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

### Health & Environmental

FloorScore Certified

Phthalate Free

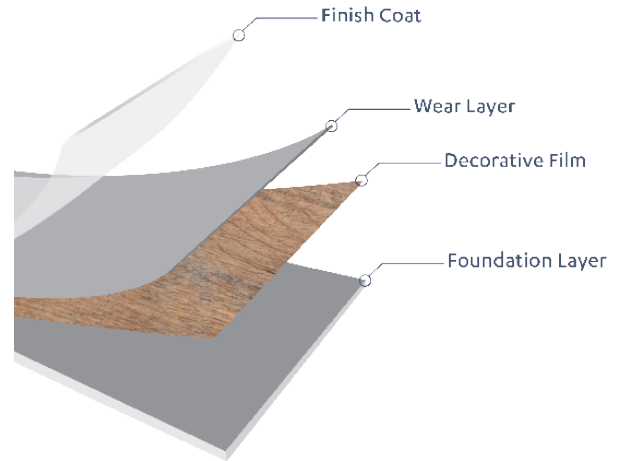

### Warranty

5 Yr Light Commercial/Multi-Family Common Areas,  
25 Yr Residential/Multi-Family Residence

### Layout Options:

