

SPECMASTER 5.0 MM

GLUE DOWN 5.0 MM, 20 MIL

| | |
|-------------------|---|
| Construction | Solid Luxury Vinyl |
| Classification | ASTM F1700, Class III, Type B |
| Dimensions | 7.25" Wide x 48" Long, 185 mm x 1229 mm |
| Overall Thickness | 5.0 mm |
| Wear Layer | 20 mil |
| Finish Coat | Low Gloss, UV Ceramic Coating |
| Texture | Embossed |
| Edge Profile | Rolled Edges |
| Packaging | 22.026 sf/carton - 50 cartons/pallet - 1101 sf/pallet |

Installation & Maintenance

Glue Down Adhesive: Residential & Multi-Family - WF Taylor Dynamic

Commercial - WF Taylor Pinnacle or Resolute

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH Cleaner


Test Method & Requirements

| | | |
|---|------------|------------------|
| Solid Vinyl Floor Tile | ASTM F1700 | Pass |
| Flexibility | ASTM F137 | Pass |
| Thickness | ASTM F386 | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Stain/Chemical Resistance | ASTM F925 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2055 | Pass |
| Dimensional Stability w/Exposure to Heat | ASTM F2199 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit | ASTM F970 | PASS >250 LBS |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |

Health & Environmental

FloorScore Certified

Pthalate Free

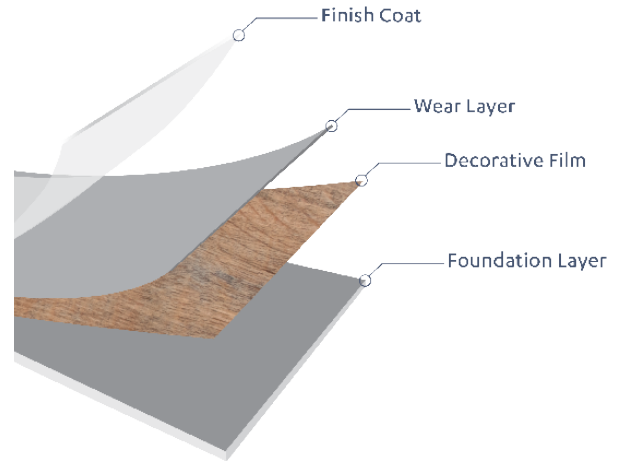

Warranty

10 Yr Commercial/Multi-Family Common Areas,
30 Yr Residential/Multi-Family Residence

Layout Options:

